

- Conduct regular inspections
- Verify proper application and use
- Verify the load per approved drawings
- Check for damage or dislodgement



- These capacities are based on UNDAMAGED components
- Damage reduces the rack capacity
- Repair and/or replacement must be done under the supervision of the Engineer of Record



- Do not climb on racks
- Do not alter without approval from the engineer of record or the supplier





All rack capacities per ANSI MH16.1 2012








## **A** WARNING

## LOADING DETAILS

## **Configuration 1: Packaging**

Levels 1-3: 4,000 lbs. MAX per level

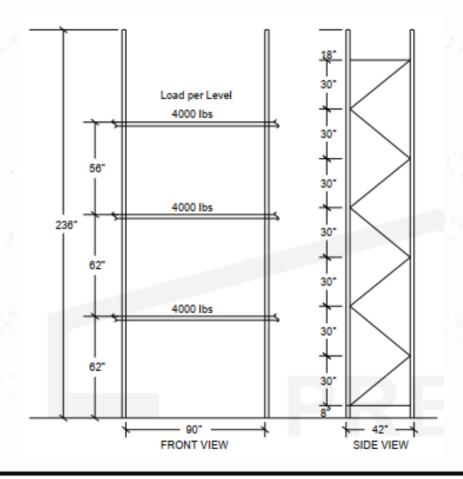

Project Name:.

Address:

Date: X/X/XX

TO ORDER LOAD SIGNS CONTACT: CustomerService@seizmicinc.com (909)869-0989